

# NUDIBOSS SHOWER AWNING

## Set up and care instructions



## Get acquainted with your NudiBoss

Get to know your NudiBoss vehicle shower awning and check that you have all the components prior to first use:

### Vehicle shower awning

- 1000GSM PVC bag
- 280GSM polyester cotton canvas, waterproof 3000mm, UV50++
- Open size: 100cm x 100cm x 200cm
- Closed size: 104cm x 10cm x 13cm
- Package size: 110cm x 16cm x 16cm
- Net weight: 7.5kg
- Gross weight: 9.85kg
- Aluminum laser engraved frame

### Parts list

- 1 x top cover
- 1 x dual-color dimmable LED strip with switch control; 1 x 2m cable with USB plug
- 2 x 304 stainless steel L-bracket spray black
- 2 x 304 stainless steel clips
- All bolts, nuts, washers, clips are 304 stainless steel
- 8 x each M8 bolts, nuts, and washers
- 4 x pegs and 1 x carabiner
- 2 wrenches



## Attaching your NudiBoss to a vehicle


CampBoss recommends using an experienced and qualified aftermarket 4X4 accessories fitter to mount your NudiBoss awning to your vehicle. CampBoss doesn't accept any responsibility for the fitment of a NudiBoss awning to any vehicle, roof rack, or roof tray.

### ATTACHING THE L-BRACKETS TO A VEHICLE

- Using two people, temporarily lift the closed awning into position to check the fitting location. Things to check for include clearance of side doors, tailgates, snorkels, and any other vehicle attachments. Take note of the appropriate mounting locations for the L-brackets.
- Attach the two black stainless steel L-brackets to the roof rack or roof tray using the included M8 bolts, washers and nuts.
- The included L-brackets and stainless steel bolts will suit a variety of roof racks and roof trays, however since the designs and attachment styles of different racks and trays can be considerably different, additional specific attachments may be needed to secure the NudiBoss properly. Ask your qualified 4X4 accessories fitter for advice on mounting options, and for advice on roof load capacities.

### ATTACHING THE AWNING TO THE L-BRACKETS

- Insert and slide in the required number of M8 bolts into the rear metal extrusion of the awning body.
- Using two people, lift the awning into position on the vehicle. Line up the sliding bolts with the locations of the L-brackets.
- Secure into place using the M8 washers and nuts, ensuring the awning is firmly mounted.
- The L-brackets and fasteners should be checked regularly on both the awning body and the roof rack or roof tray to ensure it remains secure. Prolonged travelling on rough or corrugated terrain will require more frequent checking intervals.

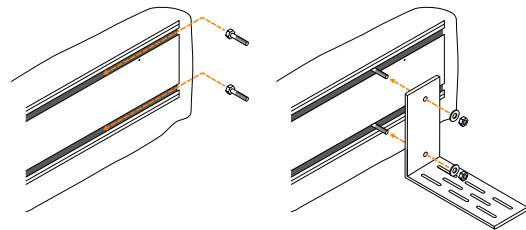

## Set up your NudiBoss

- **OPEN THE PVC BAG:** unzip the protective bag, open and fold it over the top of the awning body.
- **RELEASE THE AWNING:** release the three Velcro straps and allow the polyester cotton canvas to drape into position.
- **FLIP THE ROOF BACK:** grab the outermost section which is the roof, and flip it over the top of the awning body while you set up the rest of the NudiBoss.
- **OPEN THE ARMS:** swing out the first arm from right to left about 180°. Then grab the hinged join in the centre and pull it back across to the right 90° to form a square shape. At rear right corner there's a small hole in the arm and one in the awning body frame; align these holes, insert and clip in the included carabiner to lock the awning arms into position.
- **PEG THE BASE INTO POSITION:** using four pegs, peg each corner to form a rectangular awning shape with a square base.
- **CONNECT THE LEDS:** plug the cable from the LED light strip into a USB power source.
- **ZIPPERS:** there are full-height access zippers front and back, allowing you to access the NudiBoss from outside or through the vehicle. There is an additional small zipper at the top for feeding through a shower head.
- **ATTACH THE ROOF (OPTIONAL):** while the roof isn't required for use, to gain additional privacy flip the roof panel over the top of the NudiBoss and secure it using the Velcro straps.

## Pack up your NudiBoss

- **REMOVE THE ROOF (IF ATTACHED):** undo the Velcro straps and flip the roof over the top of the awning body while you pack up the rest of the NudiBoss.
- **UNPLUG THE LEDS:** unplug the LED light strip cable and leave it hanging ready to store at the end of pack-up.
- **REMOVE PEGS:** undo all pegs from around the base.
- **CLOSE THE ARMS:** unclip and remove the carabiner from the rear right corner. Push the front right hinged join in towards the awning body, continuing until the frame forms a straight edge while sticking out to the left. Then grab the left arm and swing it 180° back into the awning body. The canvas should be draped directly below the frame.
- **FLIP THE ROOF OVER:** grab the roof and flip it back over the front of the frame so it hangs in front of the main awning.
- **SECURE THE Awning:** roll the canvas neatly up into position and secure using the three Velcro straps.
- **CLOSE THE PVC BAG:** position the protective bag back over the top of the awning body, insert and store the LED light strip cable, and zip up to cover the awning.
- **KEEP THE AWNING DRY IN STORAGE:** ideally the NudiBoss should only be packed up when completely dry ... however this isn't always possible when getting off the beaten track. In cases where the awning has to be packed up wet, the awning should be reopened and thoroughly dried as soon as possible.

## NudiBoss care instructions

- **CLEANING:** clean with cold water and a soft bristle brush when required. Do not use soaps or detergents, and avoid exposure to chemicals, fuels and oils.
- **STORAGE:** to ensure the longevity of your NudiBoss it should always be stored away clean and dry. On occasions where the awning ends up being wet during pack up, it is essential that it is set up and dried as soon as possible. Incorrect storage including while wet will void the warranty.
- **ADVERSE WEATHER:** while the NudiBoss features pegged tie-down points, in general the awning should only be used in calm conditions. To avoid the chances of personal injury and damage to the vehicle and property, CampBoss recommends the NudiBoss should not be set up in high winds or stormy conditions. Damage caused by wind or adverse weather will not be covered under warranty.
- **PEGS:** always ensure the NudiBoss is anchored correctly with the appropriate style of peg (additional types of pegs may need to be purchased separately). It is recommended to check the pegs at regular intervals to maintain the structural integrity of the NudiBoss.
- **WATER AND UV:** the NudiBoss is made from 280GSM polyester cotton canvas which is waterproof (rated to 3000mm) and has a UV rating of 50+-. Some water ingress may occur around the zippered sections.

### **SAFETY WARNINGS**

- CampBoss recommends using an experienced and qualified aftermarket 4X4 accessories fitter to mount your NudiBoss awning to your vehicle. CampBoss doesn't accept any responsibility for the fitment of a NudiBoss awning to any vehicle, roof rack, or roof tray. Additional hardware may be required for proper fitment to your particular vehicle setup.
- Fasteners and fixing connections should be checked on a regular basis to ensure the NudiBoss remains securely fastened to the vehicle. These connections should be checked more frequently when travelling across rough and corrugated terrain.
- Keep all flame and heat sources away from the NudiBoss, including naked flames and campfires.
- If a campfire is nearby keep a constant lookout for airborne burning embers that may come into contact with the awning. Keep a fire extinguisher or water bucket nearby.
- Exercise caution around the pegs and between the zippers to prevent personal injury.
- Ensure children are supervised around the awning at all times to prevent injury, and damage to the awning.

**IMPORTANT: DO NOT LEAVE YOUR AWNING UNATTENDED WITHOUT FIRST SECURING IT DOWN USING THE INCLUDED OR APPROPRIATE PEGS.**

**WINDY CONDITIONS: ALWAYS SECURE DOWN YOUR AWNING IN WINDY CONDITIONS USING THE INCLUDED OR APPROPRIATE PEGS.**